

MI_2211: Repair kit for levelling the cover flap

 iVario L P / iVario XL P

 10 min.

 Standard

 10/07/2026

Reason:

If the cover flap is not aligned correctly with the cover, wedges can be used which ensure that the cover flap is correctly aligned with the cover through tightening.

Affected units (unit size and unit type):

iVario LMX.200CE
iVario LMX.200DE

Required tool

- Standard

Required components

	Component	Article number
1	Wedges for levelling the cover flap	24.05.875P

General information

The removal and installation may only be carried out by a trained service technician.

Safety instructions

 **DANGER**

High voltage when connecting to the mains power

Danger to life when working with high voltage.

- Disconnect from the power supply.
- Secure against unintentional switching on.
- Make sure the unit is disconnected from the power.

 **CAUTION**

Sharp edges on the housing

Risk of cuts on the housing when working in the electrical compartment.


- Wear protective gloves.

Work instruction – Levelling the cover flap



1. Loosen the two screws of the cover flap.




2. Lift the cover flap and remove it.

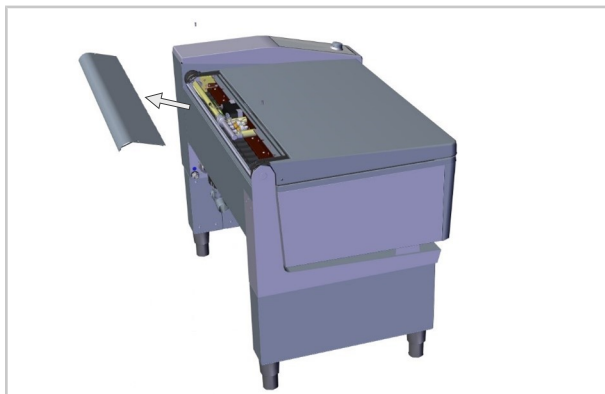

3. Slide the wedges under the cover flap holder on both sides.

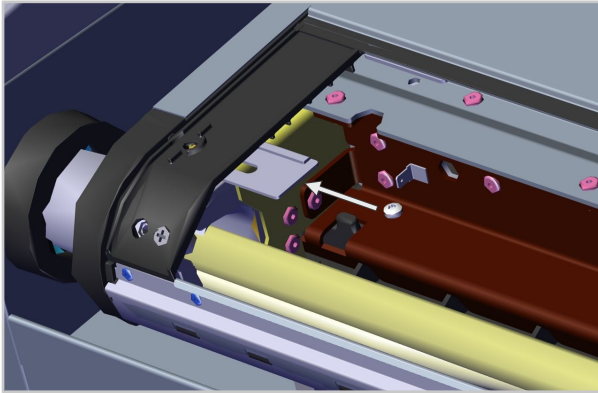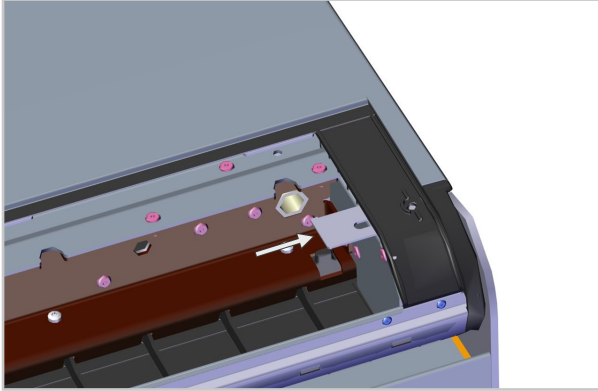

4. Put the cover flap back on and tighten both screws again.

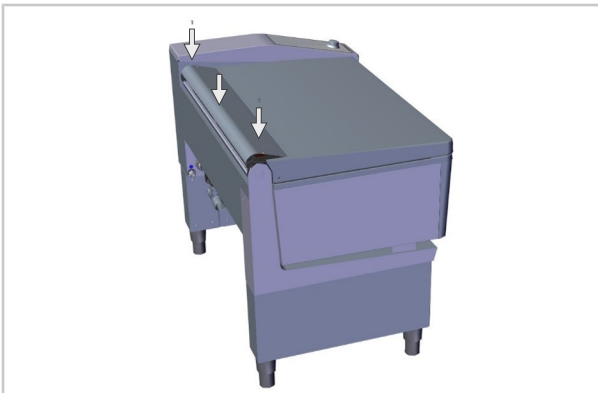

>> The cover flap was successfully levelled.