

TI_2207: New control board (CPU board)

 iCombi Pro

 ---

 ---

 14/03/2022

Subject

We would like to inform you that, since 08/03/2022, we have been using a new control board, Part no.: 42.00.251P as an alternative to the existing control board. This board is used exclusively for production and can only be operated with software version LM100 – 16.0.xx or higher.

In the case of service parts, you will continue to receive the usual circuit board.


Affected product/accessories

iCombi Pro

Affected components

Component	Article number
Control board	42.00.251P

Usual control board

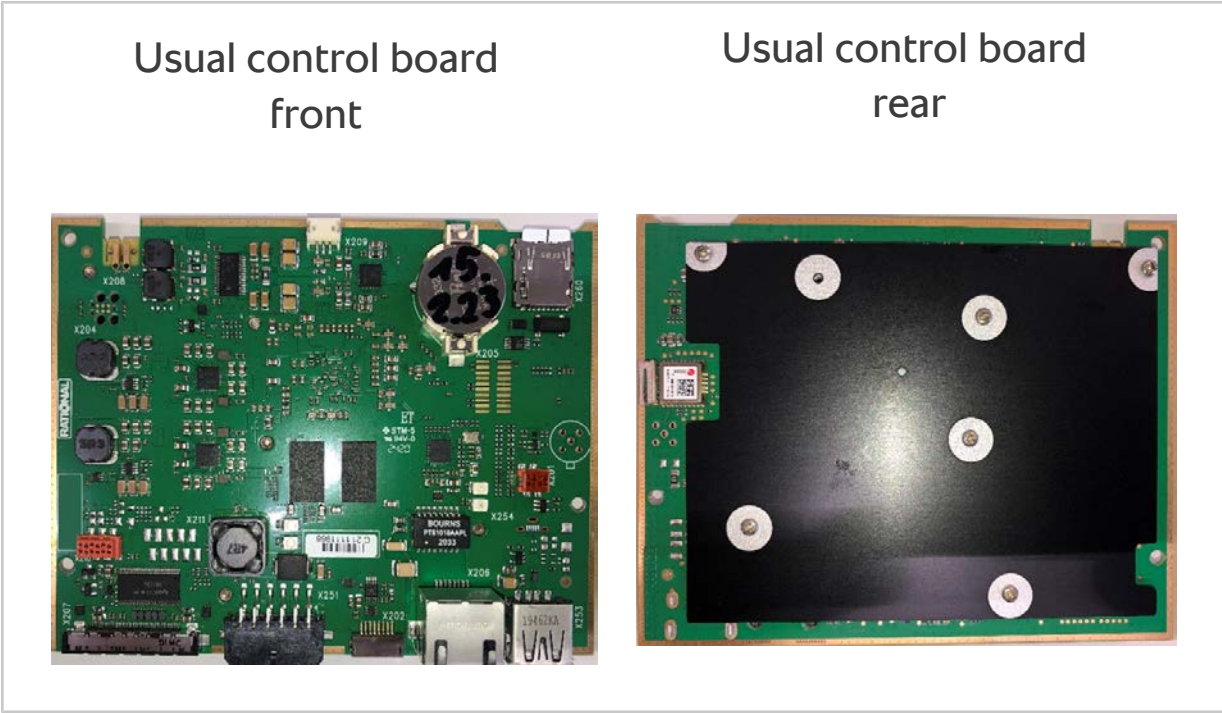


New additional control board

New additional control board
front



New additional control board
rear

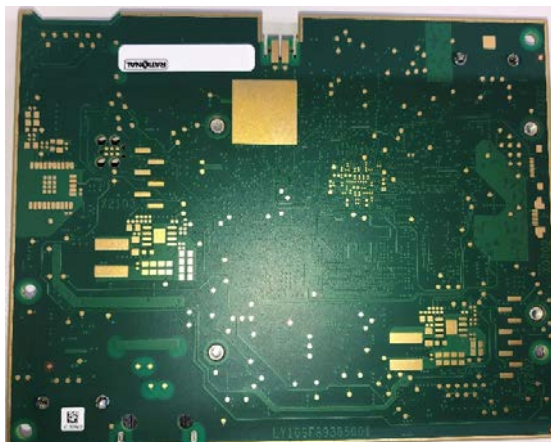

General information

Both variants of the control board are now installed ex works. Only the previous usual control board will continue to be sent as a service part. This is compatible during service work. It is not possible to convert the new alternative control board in other units (in the event of service) and the board must therefore always be replaced in this case.

Both control boards can be operated as usual with the device software provided.

NOTE:

There are no LEDs for error analysis on the new alternative control board. The existing Reset-to-Spare Part software cannot be used on the new control board either.

In the event of a fault, please contact RATIONAL Service and, if a replacement is required, always return the faulty control boards to RATIONAL, describing the fault as precisely as possible.

No other actions are required.