

MI_2106: Modification loudspeaker with adapter

 iVario, iVario Pro

 15 mins

 Standard

 22/01/2026

General information

The illustrations in this manual are examples only and may differ from the unit.

Safety instructions

 **DANGER**

High voltages when connecting to the mains power
Danger to life due to high voltage.

- Disconnect from the power supply.
- Secure against unintentional switching on.
- Make sure the unit is disconnected from the power.

 **CAUTION**


Sharp edges on the housing
Risk of cuts on the housing when working in the unit.
Wear protective gloves.

Required retrofit kit

Required retrofit kit	Article number:
Loudspeaker with adapter	87.01.875S

Preparations

1. Attach the loudspeaker to the adapter with the 2 screws.

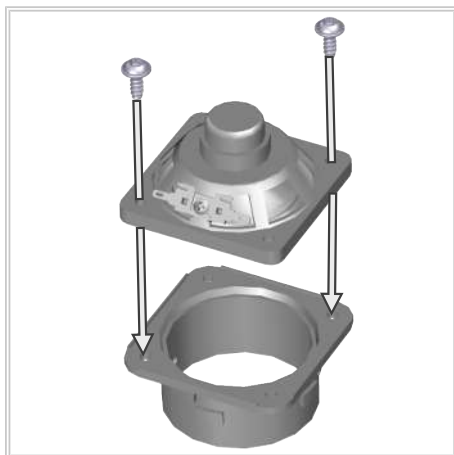


2. Connect the supplied adapter cable with the white wire to the positive pole and with the black wire to the negative pole of the loudspeaker. Note the polarity marked in the picture.




Removing loudspeaker

- ✓ The control panel is open.
- 1. Remove the wiring of the loudspeaker.
- 2. Press the lugs of the bracket slightly outwards (1) and remove the loudspeaker (2).

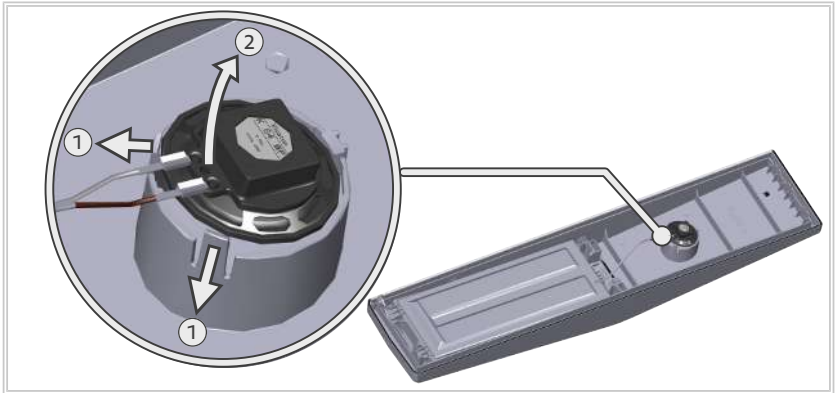


Installing loudspeaker with adapter


1. Turn the loudspeaker with adapter into the bracket.

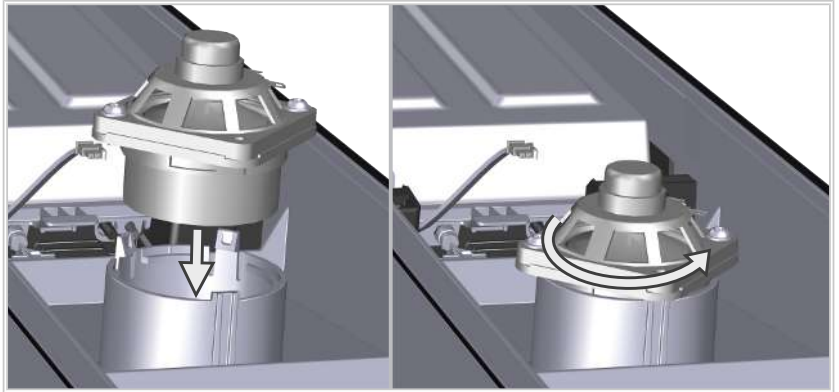

2. Drill a 4 mm diameter hole in the bracket. Keep a distance of 18 mm from the upper edge of the bracket.

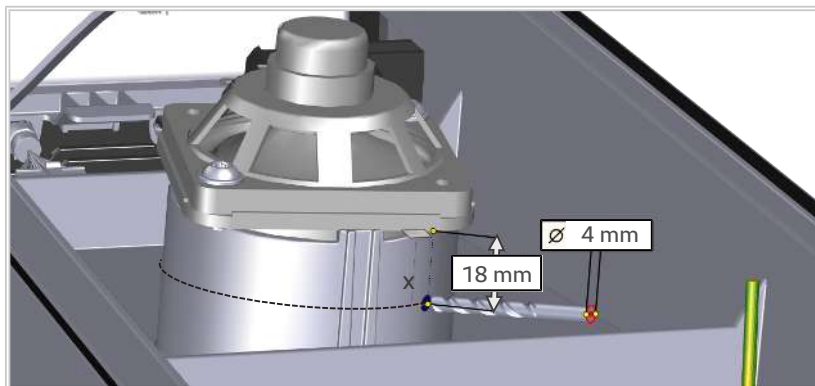

3. Fix the adapter with 1 screw.

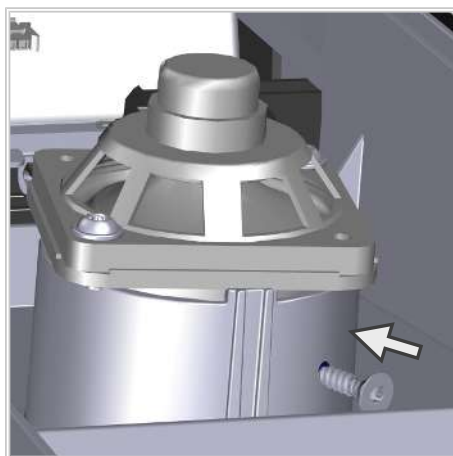

4. Plug the wiring into the loudspeaker.
 5. Close the control panel.
 6. Switch on the unit.
 7. Test the function of the loudspeaker.
- >> The loudspeaker with adapter is installed.