MI_2126: Door drip tray for tabletop units - replacement

iCombi Pro, iCombi Classic, iHexagon

15 min

Standard

21/09/2026

Topic

These modification instructions describe the removal and installation of the door drip tray for tabletop units.

Affected units

iCombi Pro and iCombi Classic

- 6-1/1
- 6-2/1
- 10-1/1
- 10-2/1

iHexagon

Required components

24.05.499S – iCombi Pro 6-1/1 & 10-1/1, iCombi Classic 6-1/1 & 10-1/1

Door drip pan complete	Swash protection right	Swash protection left	Blind rivets with threaded pin
24.05.499	24.05.501	24.05.502	10.02.008

24.05.500S – iCombi Pro 6-2/1 & 10-2/1, iCombi Classic 6-2/1 & 10-2/1

Door drip pan complete	Swash protection right	Swash protection left	Blind rivets with threaded pin
24.05.500	24.05.501	24.05.502	10.02.008

87.02.172S – iHexagon

Door drip pan complete	Swash protection right	Swash protection left	Blind rivets with threaded pin
24.05.623	24.05.665	-	10.02.008

Components included in delivery

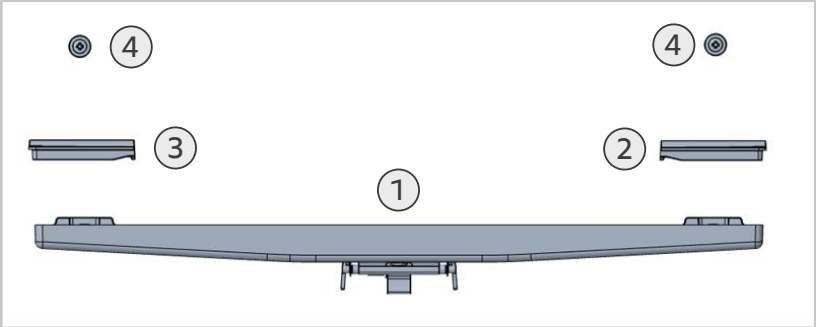

1	Door drip pan complete (1x)
2	Swash protection right (1x)
3	Splash guard left (1x) (iCombi Pro and iCombi Classic only)
4	Blind rivets with threaded pin (2x)

General information

The door is delivered fully assembled with the metal door drip tray. The new door drip pan is made of plastic and is no longer delivered pre-assembled on the door. The door drip pan must be installed by a service technician.

Target group

Installation, inspection, maintenance and repair work must only be carried out by trained technicians and technicians authorised by the manufacturer. In order to prevent accidents or damage, the manufacturer recommends that technicians attend training and safety instructions.

Information

For more information, see the installation manual.

Installation position

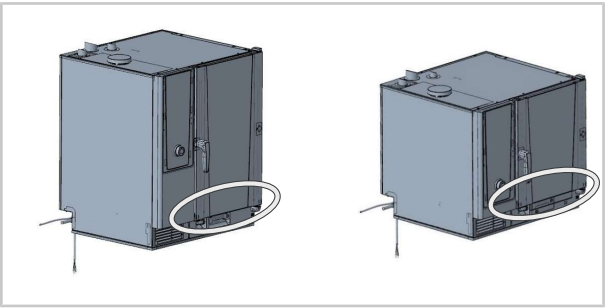

Safety instructions

⚠ CAUTION

Sharp edges on the housing
Risk of cuts on the housing when working in the unit.
- Wear protective gloves.

Information

Enter the component's installation at the service level (*Component Replacement* tab). This is an integral part of the maintenance history.

Installation - door drip tray

	1. Fix the door drip tray (1) to the inside of the door using the 2 blind rivets with threaded pins (4).
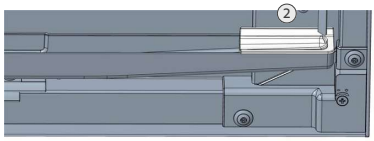	2. Place the right splash guard (2) into the right side of the door drip tray and the left splash guard into the left side of the door drip tray. **Information** **On the iHexagon, only the right splash guard (2) can be inserted.** >> The door drip tray is installed.

Removal - door drip tray

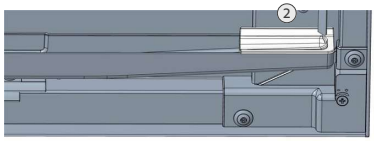	1. Remove the right splash guard (2) and the left splash guard from the door drip tray. **Information** **On the iHexagon, only the right splash guard (2) is present.**
	2. Remove the 2 blind rivets with threaded pin (4) from the door drip tray (1). 3. Remove the door drip pan (1). >> The door drip tray has been removed.