

MI_2407 Cooking cabinet seal – removal and installation

 iHexagon

 10 min.

 Standard

 24/11/2025

Topic

The information describes the removal and installation of the cooking cabinet seal.

Affected product/accessories

- iHexagon
- 6-1/1

- Required tool**
- Standard

Required components

The following components are required for removal and installation:

Component:	Item number:
Press-fit door gasket	20.04.191P

General information


NOTICE

Enter the installation of the component on the service level ("Component replacement" tab). This is an integral part of the maintenance history.

- Target group
- This document is intended for skilled technicians, who have been certified by the manufacturer after attending training and safety instructions.
 - Installation, inspection, maintenance, and repair work must only be carried out by trained technicians.
 - It is recommended that only technicians authorised by the manufacturer perform inspection, maintenance and repair work.
 - The unit may not be used, cleaned, or maintained by children. The unit may not be used for play. This is prohibited even under supervision.
 - The unit may not be used, cleaned, or maintained by people with limited physical, sensory, or mental capacity or those without the necessary experience or knowledge, unless such people are supervised by a person who is responsible for their safety and who has been informed of the hazards of the unit.

- In order to prevent accidents or damage, the manufacturer recommends that technicians attend training and safety instructions.

Installation position

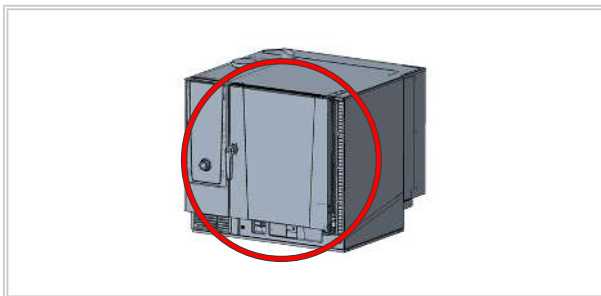

Safety instructions

DANGER

High voltages when connecting to the mains power

Danger to life due to high voltage.

- Disconnect from the power supply.
- Secure against unintentional switching on.
- Make sure the unit is disconnected from the power.

CAUTION

Sharp edges on the housing

Risk of cuts on the housing when working in the electrical compartment.
Wear protective gloves.

WARNING

Risk of chemical burns due to cleaning chemicals

There is a risk of chemical burns from conscious and unconscious contact with cleaning chemicals.

- During installation and maintenance, wear tight-fitting safety glasses and chemical protective gloves that will allow you to handle cleaning products safely.

NOTICE

Observe regional and country-specific safety and testing regulations

The relevant regional, country-specific safety and testing regulations apply to all work on RATIONAL units. These regulations may vary by region and are country-specific and are therefore not listed separately in this document.

The technician is responsible for complying with these regulations.

Work steps – removal of the cooking cabinet seal

- ✓ The unit is switched off and voltage-free.
- 1. Carefully pry out the cooking cabinet seal with a wide screw driver.
NOTICE! To do this, run the screwdriver between the cooking cabinet seal and the cooking cabinet seal groove.
- 2. Pull the cooking cabinet seal evenly out of the cooking cabinet seal groove.
- >> The removal is complete.

Work steps – installation of cooking cabinet seal


1. Always start the installation of the cooking cabinet seal at the four corners and end in the middle on each side.

NOTICE! Use soapy water to improve the sliding properties of the cooking cabinet seal.

>> The installation is complete.


NOTICE! Installation and positioning instructions

Positive fit of the cooking cabinet seal

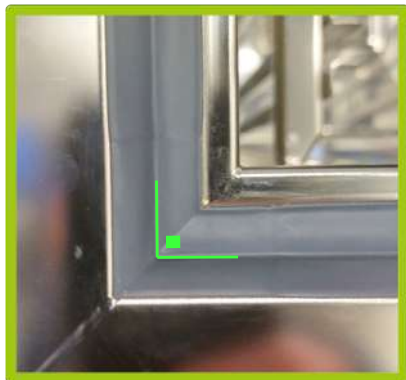

- Exact fit of the corner
- Sealing lip at right angle
- Cooking cabinet seal groove completely sealed

Negative fit of the cooking cabinet seal

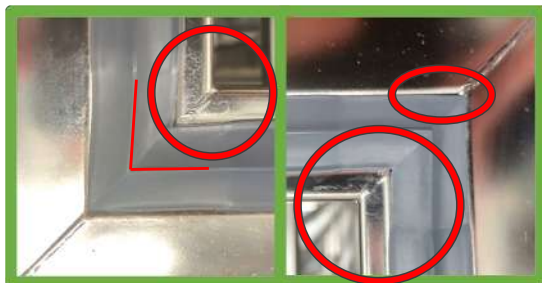

- Corner not seated correctly
- Cooking cabinet seal groove not completely sealed
- Sealing lip not at right angle ("compressed in corner")