

MI_2504: Stand extension 30 mm - installation

 iVario 2-XS / Pro 2-S

 10 min.

 Standard

 01/04/2025

Topic

The information describes the installation of a 30 mm stand extension. The extension ensures the prescribed minimum distance of 30mm between the rear of the unit and the wall.

Affected product/accessories


- iVario
- 2-XS
- iVario Pro
- 2-S

Required tool

- Standard

Required components

Component	Article number
Extension 30 mm for stand	60.79.644P

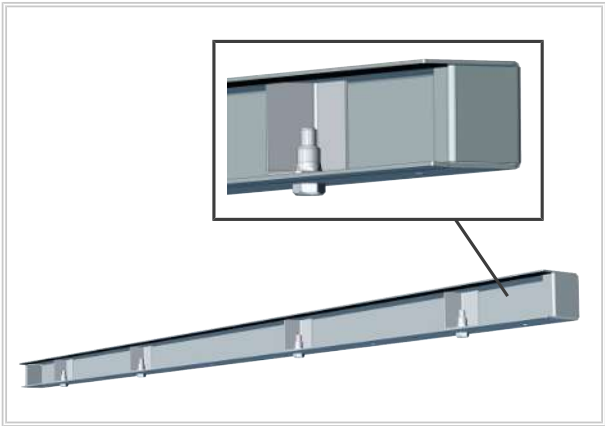

General information

NOTICE

Enter the installation of the component on the service level ("Component replacement" tab). This is an integral part of the maintenance history.

Target group

Installation, inspection, maintenance and repair work must only be carried out by trained technicians and technicians authorised by the manufacturer. In order to prevent accidents or damage, the manufacturer recommends that technicians attend training and safety instructions.

NOTICE! You can find more information in the installation manual.

Safety instructions



CAUTION

Sharp-edged panels

There is a risk of cuts when working on sheet metal parts.

- Wear protective gloves when working with sheet metal parts.

NOTICE


Observe regional and country-specific safety and testing regulations

The relevant regional, country-specific safety and testing regulations apply to all work on RATIONAL units. These regulations may vary by region and are country-specific and are therefore not listed separately in this document.

The technician is responsible for complying with these regulations.

Work steps - Installation of the stand extension.


- ✓ The stand is accessible from the rear.
 - ✓ The back of the stand is free of grease and clean.
 - ✓ The EPDM seal 2 is completely glued onto the extension 1.
1. Slide extension 1 onto the stand as far as it will go.
 - > Pay attention to the EPDM seal 2, it must not bend.

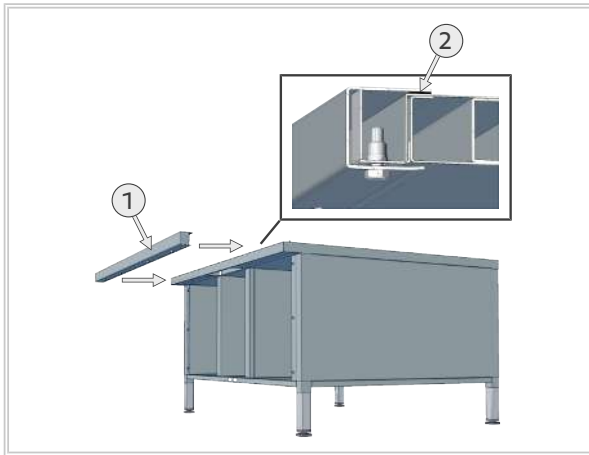

2. Align the extension on the right and left so that it is flush with the stand.



3. Now tighten the screws from below.
 - > The extension is clamped to the stand.

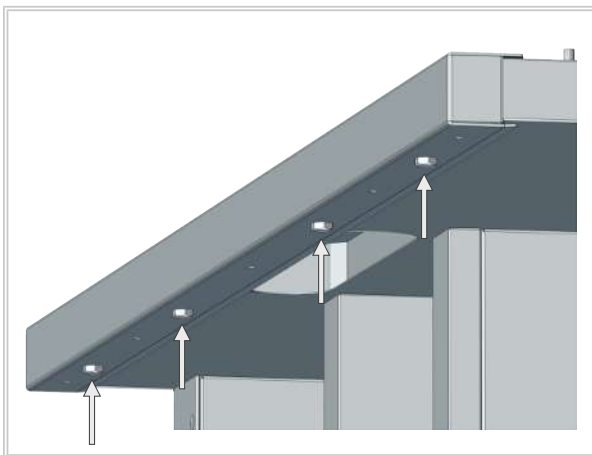

- > The installation of the stand extension is complete.

