

MI_2420: Door retaining bracket cover - replacement

 iHexagon

 5 min.

 Standard

 21/09/2026

Topic

The information describes the removal and installation of the door retaining bracket cover.

Affected appliances

iHexagon

Required tool

- Standard

Required components

The following components are required for removal and installation:

Component:	Item number:
Door retaining bracket cover	56.02.033S

General information

Information

Enter the component's installation at the service level (*Component Replacement* tab). This is an integral part of the maintenance history.

Target group

Installation, inspection, maintenance and repair work must only be carried out by trained technicians and technicians authorised by the manufacturer. In order to prevent accidents or damage, the manufacturer recommends that technicians attend training and safety instructions.

Information

For more information, see the installation manual.

Installation position



Safety instructions

DANGER

High voltage when connecting to the mains power

Danger to life when working with high voltage.

- Disconnect from the power supply.
- Secure against unintentional switching on.
- Make sure the unit is disconnected from the power.

CAUTION

Sharp edges on the housing

Risk of cuts on the housing when working in the electrical compartment.

- Wear protective gloves.

Information


Observe regional and country-specific safety and testing regulations

The relevant regional, country-specific safety and testing regulations apply to all work on RATIONAL units. These regulations may vary by region and are country-specific and are therefore not listed separately in this document.


The technician is responsible for complying with these regulations.

Removal - Door retaining bracket cover

- ✓ The unit is switched off and voltage-free.
- 1. Remove the screw on the underside of the door retaining bracket.
Use an attachment with 3 mm [$\frac{1}{8}$ in] hexagon socket for the screw driver.

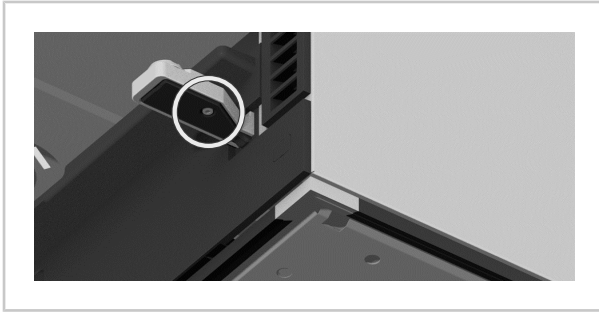

2. Remove the cover of the door retaining bracket.
To do this, use a slot attachment for the screw driver to loosen the cover and move it downwards.

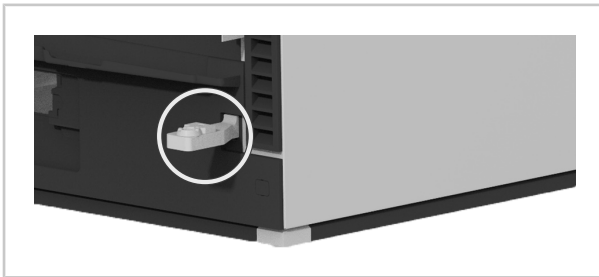

>> The removal is complete.

Installation - Door retaining bracket cover

1. To install, proceed in reverse order.
- i Information**
Please ensure that the cables are routed correctly during installation.
- >> The installation is complete.